


Mr. SLIM



Commercial Air Conditioning Systems

Functionality, Versatility and Comfort for Every Environment

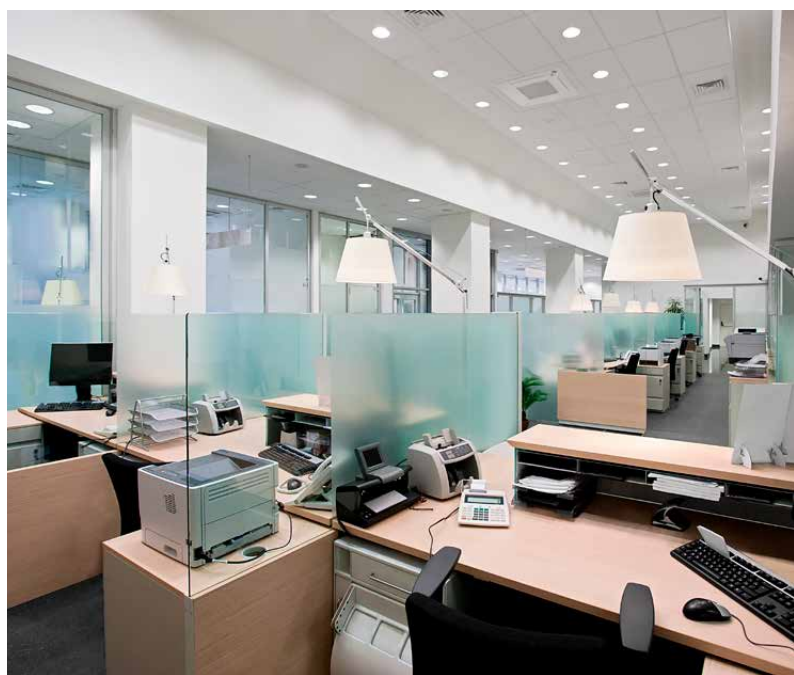

The Next Generation of R32 Commercial Solutions is Here



The next generation of R32 Mr Slim Range is here!



Our extended Mr Slim Range now offers a full selection of market leading R32 solutions. The new R32 range features the latest in super-efficient and more environmentally friendly R32 refrigerant, enabling the integration of more cost savings into any HVAC design. Featuring a GWP of just 675, R32 refrigerant is highly energy efficient and with a volumetric capacity that is around 20% higher compared to R410A, system refrigerant volumes are significantly lower.

Furthermore our R32 Mr Slim models blend a host of outstanding features with a premium quality, sophisticated design. Offering high efficiencies, advanced control options and extended pipe runs, the range is extremely flexible and cost effective.



Benefits of R32 compared to R410A

- ✓ 66% lower GWP of 675
- ✓ More environmentally friendly
- ✓ 20% less refrigerant volume requirement
- ✓ Overall higher system efficiency























Comfort takes on new meaning with Mitsubishi Electric Power Inverter Systems. Adopted the world over for their space-saving design, quiet operation, energy efficiency and durability, there is a wide variety of indoor unit designs and outdoor unit capacities ensuring the flexibility to meet the most challenging of heating and cooling needs, whether domestic or commercial.

Product Line-Up.....	2
 PEAD Series	4
Ducted System	
 PEA Series	5
Ducted System	
 SEZ Series	6
Ceiling Concealed System	
 PKA Series	7
High Wall System	
 MLZ Series	8
One-Way Ceiling Cassette System	
 SLZ Series	9
Compact Ceiling Cassette System	
 PLA Series	10
Ceiling Cassette System	
 PCA Series	12
Under-Ceiling System	
Controllers.....	14
Advanced Feature – 3D i-See Sensor	15
Outdoor Unit Specifications	16



Mr.SLIM Product Line-Up


		2.5kW	3.5kW	5.0kW	6.0kW	7.1kW
		R32	R32	R32	R32	R32
Ducted	PEAD Series			 PEAD-M50JAA	 PEAD-M60JAA	 PEAD-M71JAA
	PEA Series					
Ceiling Concealed	SEZ Series		 SEZ-M35DA	 SEZ-M50DA	 SEZ-M60DA	 SEZ-M71DA
High Wall	PKA Series					
Ceiling Cassette	MLZ Series	 MLZ-KP25VF	 MLZ-KP35VF	 MLZ-KP50VF		
	SLZ Series	 SLZ-M25FA	 SLZ-M35FA	 SLZ-M50FA	 SLZ-M60FA	
	PLA Series					 PLA-M71EA
Under Ceiling	PCA Series			 PCA-M50KA	 PCA-M60KA	 PCA-M71KA
Outdoor Unit		 SUZ-M25VAD	 SUZ-M35VAD	 SUZ-M50VAD	 SUZ-M60VAD	 SUZ-M71VAD

7.1kW	10.0kW	12.5kW	14.0kW	16.0kW	18.9kW	22.0kW
R32	R32	R32	R32	R410A	R410A	R410A
 PEAD-M71JAA	 PEAD-M100JAA	 PEAD-M125JAA	 PEAD-M140JAA			
	 PEA-M100GAA	 PEA-M125GAA	 PEA-M140GAA	 PEA-RP170WJA	 PEA-RP200WJA	 PEA-RP250WHA
 PKA-M71KAL	 PKA-M100KAL					
 PLA-M71EA	 PLA-M100EA	 PLA-M125EA	 PLA-M140EA			
 PCA-M71KA	 PCA-M100KA	 PCA-M125KA	 PCA-M140KA			
 PCA-M71HA						
 PUZ-ZM71VHA	 PUZ-ZM100VKA	 PUZ-ZM125VKA	 PUZ-ZM140VKA	 PUZ-RP170VKA	 PUZ-RP200YKA	 PUHZ-RP250YKM

PEAD Series

OPTIONAL
Wi-Fi
CONTROL

The thin, low-profile, ceiling-concealed PEAD indoor units are the perfect answer for air conditioning requirements of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, thereby reducing electricity consumption and contributing to further reductions in operating cost.

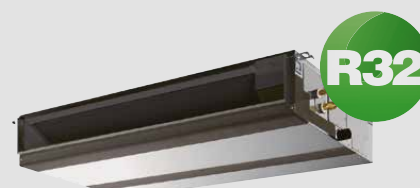

Compact Indoor Units

The height of the PEAD Range has been unified to 250mm making installation possible in low ceilings with minimal clearance space. It has variable airflow settings to ensure the best operation to match virtually all room layouts.

Wide Selection of Fan Speeds and External Static Pressure

All PEAD models incorporate five-stage external static pressure conversions and three fan speed selections, offering the ultimate in comfort diversity. With a wide range of adjustable static pressures (35-125Pa), PEAD Series units are applicable to a wide range of building types and applications.

Zone Controller (Optional)



The optional Zone Controller brings intuitive yet simple control to a whole new level, with the ability to control up to eight zones, automatic unloading/ramping and energy saving sensor functions.

Find out more about this controller on page 14.

Specifications: PEAD Ducted Series

Refrigerant		R32													
Indoor Unit		PEAD-M50JAA		PEAD-M60JAA		PEAD-M71JAA		PEAD-M71JAA		PEAD-M100JAA		PEAD-M125JAA		PEAD-M140JAA	
Outdoor Unit		SUZ-M50VAD		SUZ-M60VAD		SUZ-M71VAD		PUZ-ZM71VHA		PUZ-ZM100VKA		PUZ-ZM125VKA		PUZ-ZM140VKA	
Function		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity (min.-max.)	(kW)	5.0 (2.3-6.2)	6.0 (1.7-7.4)	6.0 (2.3-6.5)	7.0 (2.8-8.0)	7.1 (2.8-8.1)	8.0 (2.6-10.2)	7.1 (3.3-8.1)	8.0 (3.5-10.2)	10.0 (4.9-11.4)	11.2 (4.5-14.0)	12.5 (5.5-14.0)	14.0 (5.0-16.0)	14.0 (6.2-15.3)	16.0 (5.7-18.0)
Power Input	(kW)	1.33	1.44	1.72	1.85	1.98	2.00	1.85	1.93	2.67	2.80	3.66	3.52	4.37	4.18
Rated EER/COP		3.75	4.16	3.48	3.78	3.58	4.00	3.83	4.14	3.74	4.00	3.41	3.97	3.20	3.82
Rated AEEER/ACOP		3.70	4.09	3.43	3.72	3.53	3.93	3.63	3.93	3.60	3.86	3.32	3.86	3.13	3.73
Power Supply		Single-Phase, 50Hz, 230V													
Airflow (Lo-Hi)	m³/min	12-14.5-17		14.5-18-21		17.5-21-25		17.5-21-25		24-29-34		29.5-35.5-42		32-39-46	
	L/S	200-242-283		242-300-350		292-350-417		292-350-417		400-483-567		492-592-700		533-650-767	
Sound Pressure Level	(dB)	30-35-39		30-32-36		30-33-38		30-33-38		33-38-42		36-40-44		40-44-49	
External Static Pressure Pa		35/50/70/100/125													
Dimensions	Height (mm)	250		250		250		250		250		250		250	
	Width (mm)	900		1,100		1,100		1,100		1,400		1,400		1,600	
	Depth (mm)	732		732		732		732		732		732		732	
Weight	(kg)	26		29		30		30		39		40		44	

Refer to page 16 for outdoor specifications.

PEA Series


OPTIONAL
Wi-Fi
CONTROL

The PEA Series' high static airflow allows air to be directed to different areas of your home or office with ease, ideal for heating or cooling a number of rooms at once. With an aesthetically pleasing ceiling installation and vast line-up of performance functions, the PEA Series provides the ultimate in comfort.



Flexible Duct Design Enables Use of High-Pressure Static Fan

With a maximum 150Pa external static high-pressure setting, PEA Series models offer complete flexibility in duct design. The increased variation in airflow options ensures operation that best matches virtually all room layouts.



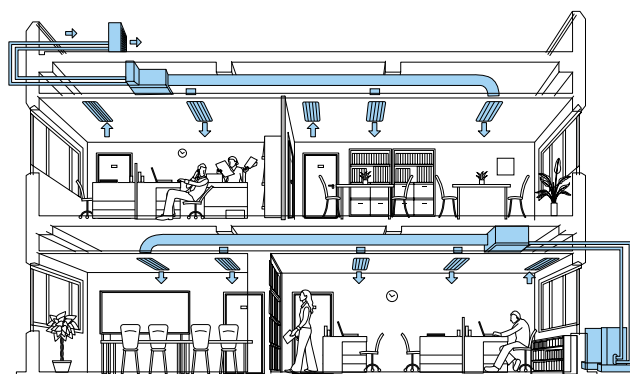


New PEA-RP170/200/250

For greater room capacities, these units provide easier handling with two-piece construction and increased variation in airflow; ensuring operation that suits most room layouts.

Versatile and Easy Installation Options

PEA Series models offer both versatility and ease of installation/application; for example, it is possible to adjust the distance between the air-intake and air-outlet vents to create the optimal airflow configuration.



Zone Controller (Optional)



The optional Zone Controller brings intuitive yet simple control to a whole new level, with the ability to control up to eight zones, automatic unloading/ramping and energy saving sensor functions.

Find out more about this controller on page 14.

Specifications: PEA Ducted Series

Refrigerant			R32						R410A					
Indoor Unit			PEA-M100GAA		PEA-M125GAA		PEA-M140GAA		PEA-RP170WJA		PEA-RP200WJA		PEA-RP250WHA	
Outdoor Unit			PUZ-ZM100VKA		PUZ-ZM125VKA		PUZ-ZM140VKA		PUZ-RP170VKA		PUZ-RP200YKA		PUHZ-RP250YKM	
Function			Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity (min.-max.)	(kW)		10.0 (4.9-11.4)	11.2 (4.5-14.0)	12.5 (5.5-14.0)	14.0 (5.0-16.0)	14.0 (6.2-15.3)	16.0 (5.7-18.0)	16.0 (9.0-19.5)	20.0 (9.5-22.4)	18.9 (9.0-22.4)	22.4 (9.5-25.0)	22.0 (11.2-27.0)	25.0 (12.5-29.0)
Power Input	(kW)		2.39	2.51	3.52	3.27	4.10	3.90	4.94	6.00	5.92	6.89	6.11	6.89
Rated EER/COP *1			4.18	4.46	3.55	4.28	3.41	4.10	3.23	3.33	3.19	3.25	3.60	3.62
Rated AEER/ACOP			4.01	4.28	3.45	4.15	3.33	3.99	3.16	3.26	3.11	3.18	3.27	3.37
Power Supply			Single-Phase, 50Hz, 230V								Three-phase, 50Hz, 400V			
Airflow (Lo-Hi)	m³/min		34-42		48-60				50-61-72				58-71-84	
	L/S		567-700		800-1000				833-1017-1200				967-1183-1400	
Sound Pressure Level *2		(dB)	39-42		42-45				38-41-44				40-43-46	
External Static Pressure Pa			50/100/150						60/75/100/150					
Dimensions	Height	(mm)	400						470					
	Width	(mm)	1,400						1370					
	Depth	(mm)	634						1120					
Weight		(kg)	63						108					

*1 Rated EER/COP for PEA-RP170WJA are measured at ESP 75 Pa


*2 Sound pressure level are measured in anechoic chamber at ESP 150 Pa

Refer to page 16 for outdoor specifications.

SEZ Series

OPTIONAL
Wi-Fi
CONTROL

The SEZ Series is conveniently hidden in the ceiling cavity with only the grilles visible. Compact, whisper quiet and highly efficient, these concealed units fit easily and discreetly into rooms with lowered or bulkhead ceilings.

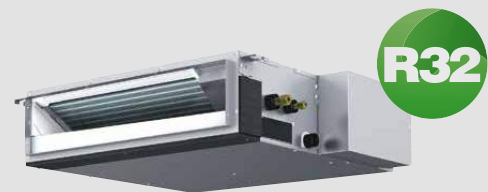

Compact Design

Ceiling concealed and a slim 200mm in height, the SEZ Series is ideal for tight installation spaces.

Quiet Comfort

The SEZ Series offers whisper quiet operation, starting at a hushed 23dBA*.

Air Cleaning Filter

This built-in filter removes dust and other irritating particles, keeping the air clean at all times. Maintenance is as simple as vacuuming. The long-life filter in the SEZ Series indoor units can be used for approximately 2,500 hours before requiring replacement.

Easy Installation

The SEZ Series' lightweight design and low unit height makes for an easier and more convenient installation.

*SEZ-M35 indoor sound level on lowest fan speed.

Specifications: SEZ Ceiling Concealed Series


Refrigerant		R32								
Indoor Unit		SEZ-M35DA		SEZ-M50DA		SEZ-M60DA		SEZ-M71DA		
Outdoor Unit		SUZ-M35VAD		SUZ-M50VAD		SUZ-M60VAD		SUZ-M71VAD		
Function		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	
Capacity (min.-max.)	(kW)	3.5 (1.5-4.0)	4.0 (1.3-5.0)	5.0 (2.3-6.3)	6.0 (1.7-7.2)	6.0 (2.3-6.5)	7.0 (2.5-8.0)	7.1 (2.8-8.3)	8.0 (2.6-10.4)	
Power Input	(kW)	1.01	1.11	1.40	1.66	1.73	2.00	2.14	2.22	
Rated EER/COP		3.46	3.60	3.57	3.61	3.46	3.50	3.31	3.60	
Rated AEER/ACOP		3.39	3.53	3.51	3.57	3.41	3.45	3.27	3.55	
Power Supply		V: Single-phase, 50Hz, 230V								
Airflow (Lo-Mid-Hi)	m³/min	7-9-11		10-12.5-15		12-15-18		12-16-20		
	L/S	117-150-183		167-208-250		200-250-300		200-267-333		
External Static Pressure		Pa	5/15/35/50							
Sound Pressure Level		(dB)	23-28-33		30-34-37		30-34-38		30-35-40	
Dimensions	Height	(mm)	200		200		200		200	
	Width	(mm)	990		990		1190		1190	
	Depth	(mm)	700		700		700		700	
Weight		(kg)	21		22		25.5		25.5	

Refer to page 16 for outdoor specifications.

PKA Series


OPTIONAL
Wi-Fi
CONTROL

The large capacity PKA Series is both elegant and compact. With greater placement options and high airflow, PKA Series units are ideal for light commercial use (i.e. offices, stores, and server rooms).

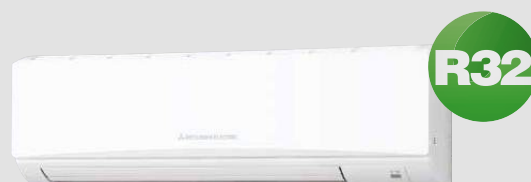

Quick Clean Grille

The intake grille can easily slide out completely, allowing simple cleaning without any special tools; making it easy to clean in minutes by washing in water.

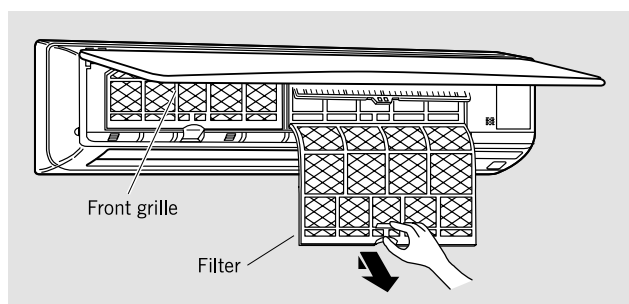

Wired Remote Controller Available (Optional)



A separately sold wired remote controller and terminal block are available to suit various installation sites. When connecting a wired remote controller the MAC-334IF-E interface is not required.

Auto-Vane Shutter

The vane closes automatically when the unit is not running, creating a sleek flat finish that is aesthetically pleasing.

Suitable for Server Room Applications

The PKA Series provides an economical split system solution for high sensible applications due to their larger coil size. As a result they are ideal for applications such as server rooms and laboratories where there is a need for sensible cooling.

Drain Pump Option

Installation of a drain pump enables a drain outlet as high as 800mm above the base of the indoor unit. Drain water can be discharged easily even if the surface where the wall-mounted unit does not have direct access outside; increasing the degree of freedom for installation.

Specifications: PKA High Wall Series

Refrigerant		R32			
Indoor Unit		PKA-M71KAL		PKA-M100KAL	
Outdoor Unit		PUZ-ZM71VHA		PUZ-ZM100VKA	
Function		Cooling	Heating	Cooling	Heating
Capacity (min.-max.)	(kW)	7.1 (3.3-8.1)	8.0 (3.5-10.2)	10.0 (4.9-11.4)	11.2 (4.5-14.0)
Power Input	(kW)	1.86	2.12	2.81	3.10
Rated EER/COP		3.81	3.77	3.55	3.61
Rated AEER/ACOP		3.61	3.60	3.43	3.49
Power Supply		V: Single-phase, 50Hz, 230V			
Airflow (Lo-Mid-Hi)	m³/min	18-20-22		20-23-26	
	L/S	300-333-367		333-383-433	
Sound Pressure Level		(dB)	39-42-45		41-45-49
Dimensions	Height	(mm)	365		
	Width	(mm)	1,170		
	Depth	(mm)	295		
Weight	(kg)	21			

Refer to page 16 for outdoor specifications.



MLZ Series



The MLZ One-Way Cassette Series offer a compact and streamlined ceiling-mounted solution for unobtrusive comfort. Featuring a new design combined with advanced airflow options, the MLZ Series is ideal for both home and office applications.



Slim Body Design

The new units are designed with a slim body (only 185mm high), ensuring easy installation even when low ceiling cavities limit installation space. The need for ceiling cavity service space is also eliminated, further reducing the dimensions required for installation.




Set Airflow According to Ceiling Height

Dual-level airflow selection is engineered to accommodate specific ceiling heights. This is a key feature for adjusting airflow effectively when it is either too strong or too weak due to being mismatched with the height of the ceiling.

Capacity Class	25	35	50
Standard	2.4m	2.4m	2.4m
High Ceiling	2.7m	2.7m	2.7m

Auto Vane Control

Outlet vanes can be moved left and right, and up and down using the remote controller. This improved airflow control feature solves the problem of draughts.

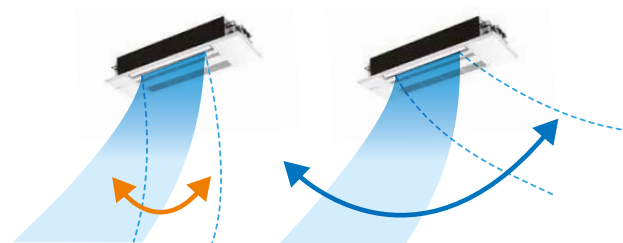

Up and Down

Left and Right

Only available when Econo Cool is set.

Horizontal Airflow

The new airflow control completely eliminates that uncomfortable draughty-feeling with the introduction of a horizontal airflow that spreads across the ceiling. The ideal airflow for offices and restaurants.

Specifications: MLZ One-Way Ceiling Cassette Series

Refrigerant		R32					
Indoor Unit		MLZ-KP25VF		MLZ-KP35VF		MLZ-KP50VF	
Outdoor Unit		SUZ-M25VAD		SUZ-M35VAD		SUZ-M50VAD	
Function		Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity (min.-max.)	(kW)	2.5 (1.5-3.2)	3.2 (1.3-4.2)	3.5 (1.5-4.1)	4.1 (1.3-4.7)	5.0 (2.3-5.5)	6.0 (1.7-6.8)
Power Input	(kW)	0.59	0.79	0.90	1.13	1.37	1.83
Rated EER/COP		4.23	4.05	3.88	3.62	3.64	3.27
Rated AEER/ACOP		4.07	3.93	3.80	3.56	3.59	3.24
Power Supply		Single-phase, 50Hz, 230V					
Airflow	m ³ /min	6-7-8-8.5	6-7-8-9	6-7.5-8.5-9.5	6-7.5-8.5-10	6-8-9.5-11.5	6-8.5-10-12
	L/S	100-120-133-147	100-117-137-153	100-122-140-157	100-128-147-165	100-138-163-190	100-147-172-197
Sound Pressure Level	(dB)	27-31-34-38	26-29-34-37	27-32-36-40	26-32-36-40	29-36-41-47	26-37-42-48
Dimensions	Height	Unit: 185, Panel: 24					
	Width	Unit: 1102, Panel: 1200					
	Depth	Unit: 360, Panel: 424					
Weight (indoor)	(kg)	Unit: 15.5, Panel: 3.5					

Refer to page 16 for outdoor specifications.

SLZ Series



The SLZ Compact Cassette Series provides a smart solution to comfortable and efficient heating and cooling. Combining a stylish square design with the latest energy-saving technologies, it is designed to fit flush into ceilings – making it ideal in both homes and commercial spaces.



3D i-See Sensor

The 3D i-See Sensor works to detect the floor temperature and how many people are present in the room; automatically switching to the optimal operating mode based on this information. With a total of eight sensors, which rotate a full 360° in three minute intervals, the 3D i-See Sensor is able to detect people's positions within the room to provide direct or indirect airflow, as preferred.

Find out more about this feature on page 15.

Stylish, Slimline Design

With an inconspicuous look that blends seamlessly into any room, the SLZ Series' pure white colour and compact, linear design is ideal for discreet heating and cooling. A recipient of the Good Design Award, the new SLZ Series fits into narrow ceiling spaces with a height of only 245mm.

Low Noise Levels

The patented 3D turbo fan with two-stage blade structure ensures low noise operation, for a quieter comfortable environment. Starting from a hushed 25dBA*, the SLZ Series offers whisper quiet operation.

Fresh Air Intake

A duct opening is provided in the main body making it possible to bring fresh air in directly, where it can then be heated to provide clean, refreshing comfort.

Horizontal Airflow

The SLZ Series eliminates uncomfortable draughts and provides improved airflow control with six different discharge functions.

The air discharge channels provide a lateral airflow advantage; ensuring users are not susceptible to airflow and air is discharged evenly across the entire space.

*SLZ-M25/35 indoor sound level on lowest fan speed.

Specifications: SLZ Compact Ceiling Cassette Series

Refrigerant		R32								
Indoor Unit		SLZ-M25FA		SLZ-M35FA		SLZ-M50FA		SLZ-M60FA		
Outdoor Unit		SUZ-M25VAD		SUZ-M35VAD		SUZ-M50VAD		SUZ-M60VAD		
Function		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	
Capacity (min.-max.)	(kW)	2.5 (1.5-3.5)	3.0 (1.3-4.1)	3.5 (1.5-4.0)	4.0 (1.3-5.0)	5.0 (2.3-5.5)	5.0 (1.7-5.5)	5.6 (2.3-6.7)	6.0 (2.5-7.6)	
Power Input	(kW)	0.62	0.78	0.93	1.05	1.49	1.58	1.64	1.87	
Rated EER/COP		4.03	3.85	3.76	3.80	3.35	3.16	3.41	3.20	
Rated AEER/ACOP		3.88	3.73	3.68	3.73	3.31	3.12	3.35	3.16	
Power Supply		Single-phase, 50Hz, 230V								
Airflow	m³/min	6.5-7.5-8.5		6.5-9-11.5		7-9-11.5		7.5-11.5-13		
	L/S	108-125-142		108-150-192		117-150-192		125-192-217		
Sound Pressure Level		(dB)	25-28-31		25-33-39		27-34-39		32-40-43	
Dimensions	Height	(mm)	Unit: 245, Panel: 10							
	Width	(mm)	Unit: 570, Panel: 625							
	Depth	(mm)	Unit: 570, Panel: 625							
Weight (indoor)		(kg)	Unit: 15, Panel: 3							

Refer to page 16 for outdoor specifications.


PLA Series

The PLA Large Capacity Cassette Series with advanced airflow features and independent vane direction control, provides indoor comfort in a sleek unobtrusive design. Perfect for larger residential rooms or office spaces, the PLA Series provides consistent temperatures throughout the space you need to heat or cool.

3D i-See Sensor


The PLA Series comes standard with 3D i-See Sensor Technology.

The 3D i-See Sensor works to detect the floor temperature and how many people are present in the room automatically switching to the optimal operating mode. With a total of eight sensors which rotate a full 360° in three minute intervals, it is able to detect people's position in the room to provide direct or indirect airflow as preferred.



Horizontal Airflow

The Horizontal Airflow function prevents both cold draughts and/or heating airflow from striking occupants directly, thereby keeping people from becoming over-chilled/over-heated.




Sleek, Compact Design

The PLA Series features a sleek, square design with bevelled edges that provide a compact and modern finish.

Wave Airflow Mode for Heating

Advanced control of vanes, called Wave Airflow, provides even greater heat distribution by periodically moving vanes up and down to provide a consistent temperature throughout the room.

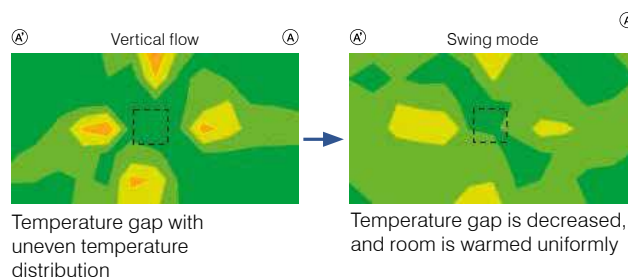

Specifications: PLA Ceiling Cassette Series

Refrigerant		R32									
Indoor Unit		PLA-M71EA		PLA-M71EA		PLA-M100EA		PLA-M125EA		PLA-M140EA	
Outdoor Unit		SUZ-M71VAD		PUZ-ZM71VHA		PUZ-ZM100VKA		PUZ-ZM125VKA		PUZ-ZM140VKA	
Function		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity (min.-max.)	(kW)	7.1 (2.8-8.1)	8.0 (2.6-10.2)	7.1 (3.3-8.1)	8.0 (3.5-10.2)	10.0 (4.9-11.4)	11.2 (4.5-14.0)	12.5 (5.5-14.0)	14.0 (5.0-16.0)	13.5 (6.2-15.3)	16.0 (5.7-18.0)
Power Input	(kW)	1.87	2.17	1.78	2.03	2.43	2.94	3.55	3.58	3.93	4.48
Rated EER/COP		3.79	3.68	3.98	3.94	4.11	3.80	3.52	3.91	3.43	3.57
Rated AEER/ACOP		3.73	3.63	3.77	3.75	3.95	3.68	3.42	3.80	3.34	3.49
Power Supply		Single-phase, 50Hz, 230V									
Airflow	m³/min	16-17-19-21		16-17-19-21		19-23-26-29		21-25-28-31		24-26-29-32	
	L/S	267-283-317-350		267-283-317-350		317-383-433-483		350-417-467-517		400-433-483-533	
Sound Pressure Level		(dB) 28-30-32-34		28-30-32-34		31-34-37-40		33-37-41-44		36-39-42-44	
Dimensions	Height	(mm)		Unit: 258, Panel: 40				Unit: 298, Panel: 40			
	Width	(mm)		Unit: 840, Panel: 950				Unit: 840, Panel: 950			
	Depth	(mm)		Unit: 840, Panel: 950				Unit: 840, Panel: 950			
Weight (indoor)		(kg)		Unit: 21, Panel: 5				Unit: 24, Panel: 5		Unit: 27, Panel: 5	

Refer to page 16 for outdoor specifications.



Wide Airflow

PLA Series Cassettes utilise wide-angle outlets to distribute airflow to all corners of the room, ensuring the room is cooled/heated in an even manner.




Both horizontal airflow and fan speed have been reduced by 20% compared to conventional models, contributing to increased comfort for occupants.

Auto Fan Speed Mode

The fan speed on PLA Series Cassettes is adjusted automatically, maintaining a comfortable environment at all times. At the start of operation, a high fan speed achieves quick heating/cooling of the room. Once the desired temperature is reached, the fan speed is reduced for stable, more efficient heating/cooling and greater comfort.

Independent Vane Direction Setting (P Series Outdoor Only)


With the ability to independently control each vane's airflow pattern, PLA Series Cassettes are perfect for both residential and office/commercial environments.

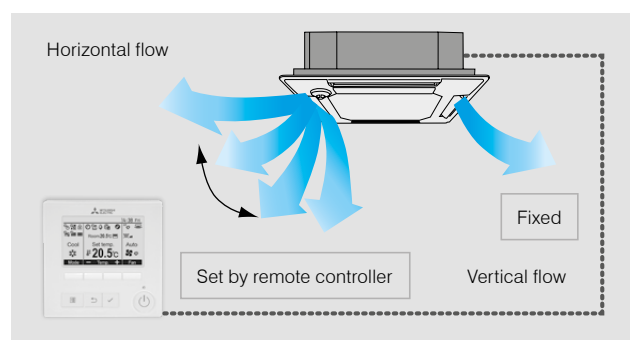

Automatic Grille Lowering Function (Optional)

An Automatic Grille Lowering Function capable of stopping at eight different heights is available to simplify filter maintenance.

- The packaged elevating (up/down) controller in the grille (PLP-6EAJ) is compatible with both PUZ Series or SUZ Series Systems.
- The Wired PAR Remote Controller includes the Automatic Grille Lowering Function. This function is only available when the indoor unit is connected to the PUZ Series outdoor unit.

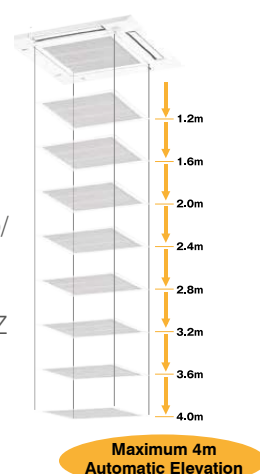

Deluxe Wireless Controller

With a backlit screen for easy viewing, and advanced feature controls, the Deluxe Wireless Controller offers the ultimate in customised comfort.



Other Features

- Stylish indoor unit vane covers (when unit is turned off)
- Quiet operation with improved airflow path and powerful high-capacity flow fan
- Maximum upward draining of 850mm
- Deluxe Wireless Remote Controller option available
- Duct flange for fresh-air intake
- Branch duct

PCA Series

The PCA Series high performance units are designed for style and efficiency. A stylish indoor unit design and airflow settings for both high and low-ceiling interiors expand installation possibilities. With four fan speed settings and auto air-speed adjustment, PCA Series units provide energy efficient comfort no matter the season.

Stylish Indoor Unit Design


The stylish, sharp design of the PCA indoor unit blends in well with ceilings, for an unobtrusive installation.

Optional Drain Pump


The pumping height of the optional drain pump has been increased from 400mm to 600mm, expanding flexibility in choice of unit location during installation work.

Drain Pump Installation

Drainage outlet can be
600mm above ceiling surface.

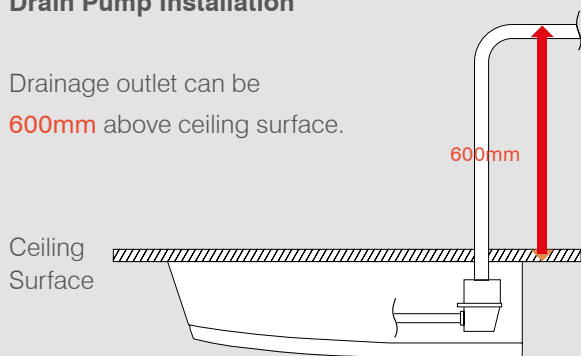

Automatic Air-Speed Adjustment

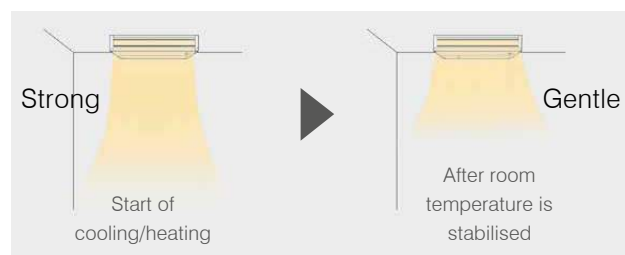

In addition to the conventional four fan speed settings, units are now equipped with an Automatic Air-Speed Adjustment Mode. This setting automatically adjusts the air-speed to conditions that match the room environment.

At the start of heating/cooling operation, the airflow is set to high-speed to quickly heat/cool the room. When the room temperature reaches the desired setting, the airflow speed is decreased automatically for comfortable heating/cooling operation.

Specifications: PCA Under-Ceiling Series

Refrigerant		R32							
Indoor Unit		PCA-M71KA		PCA-M100KA		PCA-M125KA		PCA-M140KA	
Outdoor Unit		PUZ-ZM71VHA		PUZ-ZM100VKA		PUZ-ZM125VKA		PUZ-ZM140VKA	
Function		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity (min.-max.)	(kW)	7.1 (3.3-8.1)	8.0 (3.5-10.2)	10.0 (4.9-11.4)	11.2 (4.5-14.0)	12.5 (5.5-14.0)	14.0 (5.0-16.0)	13.5 (6.2-15.3)	16.0 (5.7-18.0)
Power Input	(kW)	1.82	2.15	2.55	3.28	3.77	4.22	4.15	4.72
Rated EER/COP		3.90	3.72	3.92	3.41	3.31	3.31	3.25	3.38
Rated AEER/ACOP		3.69	3.55	3.77	3.31	3.22	3.23	3.17	3.31
Power Supply		V: Single-phase, 50Hz, 230V							
Airflow (Lo-Mid-Hi)	m³/min	16-17-18-20		22-24-26-28		23-25-27-29		24-26-29-32	
	L/S	267-283-300-333		367-400-433-467		383-417-450-483		400-433-483-533	
Sound Pressure Level		35-37-39-41		37-39-41-43		39-41-43-45		41-43-45-48	
Dimensions	Height (mm)	230				230			
	Width (mm)	1,280				1,600			
	Depth (mm)	680				680			
Weight	(kg)	32		37		38		40	


Refer to page 16 for outdoor specifications.



Fresh Outside Air Intake

Units are equipped with a knock-out hole that enables the induction of fresh outside air.

Outside air intake characteristics

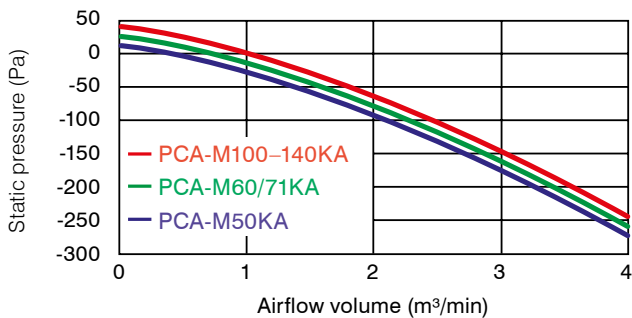

High/Low-Ceiling Modes

All PCA Series units are equipped with High and Low-Ceiling Operation Modes, that make it possible to switch the airflow volume to match room height. The ability to choose the optimum airflow volume makes it possible to optimise the breezy sensation felt throughout the room.

Capacity	High ceiling	Standard ceiling	Low ceiling
PCA-M50	3.5m	2.7m	2.5m
PCA-M60	3.5m	2.7m	2.5m
PCA-M71	3.5m	2.7m	2.5m
PCA-M100	4.2m	3.0m	2.6m
PCA-M125	4.2m	3.0m	2.6m
PCA-M140	4.2m	3.0m	2.6m

Specifications: PCA Under-Ceiling Series

Refrigerant		R32					
Indoor Unit		PCA-M50KA		PCA-M60KA		PCA-M71KA	
Outdoor Unit		SUZ-M50VAD		SUZ-M60VAD		SUZ-M71VAD	
Function		Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity (min.-max.)	(kW)	5.0 (2.3-6.0)	6.0 (1.7-7.0)	6.0 (2.3-6.5)	7.0 (2.5-8.0)	7.1 (2.8-8.1)	8.0 (2.6-10.2)
Power Input	(kW)	1.28	1.65	1.60	1.72	1.98	2.24
Rated EER/COP		3.90	3.63	3.75	4.06	3.58	3.57
Rated AEEER/ACOP		3.84	3.59	3.68	4.00	3.53	3.52
Power Supply		V: Single-phase, 50Hz, 230V					
Airflow (Lo-Mid-Hi)	m³/min	10-11-13-15		15-16-17-19		16-17-18-20	
	L/S	167-183-217-250		250-267-283-317		267-283-300-333	
Sound Pressure Level		(dB)		32-34-37-40		33-35-37-40	
Dimensions	Height (mm)	230		230		230	
	Width (mm)	960		1,280		1,280	
	Depth (mm)	680		680		680	
Weight	(kg)	26		32		32	

Refer to page 16 for outdoor specifications.

Specifications: PCA-M71HA Under-Ceiling (Stainless Steel Indoor)

Refrigerant		R32	
Indoor Unit		PCA-M71HA	
Outdoor Unit		PUZ-ZM71VHA	
Function		Cooling	Heating
Capacity (min.-max.)	(kW)	7.1 (3.3-8.1)	7.6 (3.5-10.2)
Power Input	(kW)	2.02	2.17
Rated EER/COP		3.51	3.50
Rated AEEER/ACOP		3.34	3.34
Power Supply		V: Single-phase, 50Hz, 230V	
Airflow (Lo-Mid-Hi)	m³/min	16-18	
	L/S	267-300	
Sound Pressure Level		(dB)	
Dimensions	Height (mm)	280	
	Width (mm)	1136	
	Depth (mm)	650	
Weight	(kg)	42	

Refer to page 16 for outdoor specifications.

Controllers

Wall Mounted 7-Day Controller

The PAR Controller allows you to program up to eight stop/start patterns per day for up to seven days at a time. With an easy to read full dot LCD backlit screen, simple menu format and a variety of operation control functions, temperature monitoring and management is available at the touch of a button.



PAR-*MAA

Optional Touch Panel Controller

The PAR-CT01 features a 3.5" HVGA Full Colour LCD touch panel screen, allowing 180 different colour patterns to be selected for control parameters or background. A simple operation panel is available to display only ON/OFF, set temperature and fan speed – ideal for hotels. Your company logo or image can be displayed on the screen and there is the ability to control two spaces and communicate with a smart phone or tablet device via Bluetooth.



PAR-CT01

Optional Wall Mounted Zone Controller

The PAC-ZC40~80 Zone Controller brings expanded functionality and interaction to realise even greater energy savings. With the ability to control up to eight zones*, equipped with automatic unloading/ramping and three built-in sensor functions (temperature, occupancy, brightness), the Zone Controller brings intuitive, yet simple control to a whole new level.

*Eight zones available with PAC-ZC80(H/L)-E.



PAC-ZC40(H/L)-E

Temperature Sensor

Sensing the return air of the indoor ducted unit is not always ideal. With an inbuilt thermostat (PAR-ZC01ME-E Wall Controller) the Zone Controller allows the actual usable space temperature to be measured, offering a more realistic and timely temperature measurement where it is needed most.

Optional Wall Mounted Simple Controller

The PAC-YT52CRA Simple Controller provides simplified usage, with controls limited to ON/OFF, Mode, Room Temperature, Fan Speed and additional Vane Control for cassettes and high walls. The backlit LCD screen provides easy operation in dark conditions, and the slim flat-back shape makes for a simple installation.



PAC-YT52CRA

Optional Wi-Fi Zone Control

With the addition of award-winning Mitsubishi Electric Wi-Fi Control, the Zone Controller's capabilities are expanded even further. Advanced temperature monitoring and management, customisable operation and expanded functionality are available in the palm of your hand with the Wi-Fi Control App.

Now you can control and monitor ducted heat pump zones in real time from absolutely anywhere via your smartphone, tablet or online account; for the ultimate in total comfort.



Occupancy Sensor

Incorporating a built-in Occupancy Sensor, the Zone Controller (via the PAR-ZC01ME-E Wall Controller) constantly monitors the usable area to detect vacancy. Once detected, the Zone Controller implements one of four user-defined energy-saving control options to reduce energy consumption; turn the unit ON/OFF, lower the fan speed, temperature offset, or turn user designated zones ON/OFF.

Brightness Sensor

Working in conjunction with the Occupancy Sensor, the Brightness Sensor can be set to maximise energy savings when it detects user defined "Light" or "Dark" conditions (lux values).

Backlit LCD Touch Screen

Featuring a backlit LCD screen for operation in dark conditions, and a user-defined LED indicator that lights up to indicate the current operation mode i.e. red for heating, blue for cooling, green for night setback – operation management is clear and simple.


Advanced Feature



3D i-See Sensor – PLA and SLZ Cassette Series

360° Temperature Monitoring

The 3D i-See Sensor is an infrared-based sensor that monitors floor-level temperatures throughout the room. The 3D i-See Sensor works to ensure even temperature distribution and maximise room comfort through 360° sensing that covers the whole floor space; giving a more accurate and even temperature reading and improving energy efficiency.

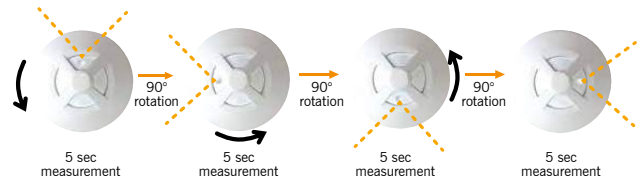

* The sensor rotates 360° once every two minutes when there is significant temperature disparity and once every five minutes when a stable, even temperature has been reached.


3D i-See Sensor Operation

The 3D i-See Sensor rotates 90° every two minutes*, taking five second measurements at each position to accurately determine floor-level temperatures on all sides of the room. The 3D i-See Sensor calculates the temperature by measuring the infrared rays emanating from the walls and floors.



Detects Number of People


The 3D i-See Sensor detects the number of people in the room and adjusts the power accordingly. This makes automatic power-saving operation possible in places where the number of people changes frequently. Additionally, when the area is continuously unoccupied, the system switches to a more enhanced power-saving mode. Depending on the setting, it can also stop the operation.

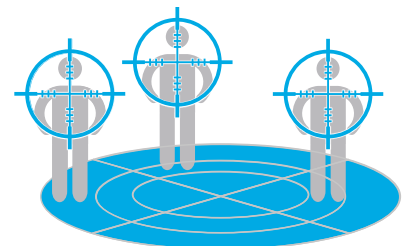

Detects People's Position

Once a person is detected, the angle of the vane is automatically adjusted. Each vane can be independently set by the user to "Direct Airflow" or "Indirect Airflow".

Detects people's position

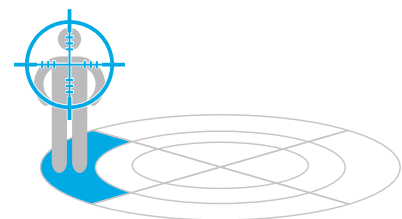


Highly Accurate Occupancy Detection

A total of eight sensors rotate a full 360°, in three minute intervals. In addition to detecting human body temperature, the 3D i-See Sensor detects the number of people and their positions.

Even Airflow – Airflow Only Where You Need It


With Even Airflow Mode, the 3D i-See Sensor memorises people's movements and furniture positions, efficiently distributing airflow only to where it is needed.

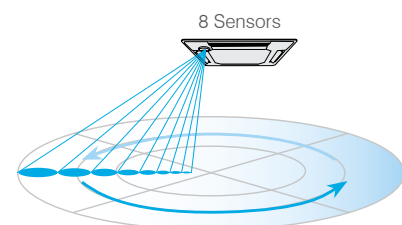


No Occupancy Modes – for Energy Savings



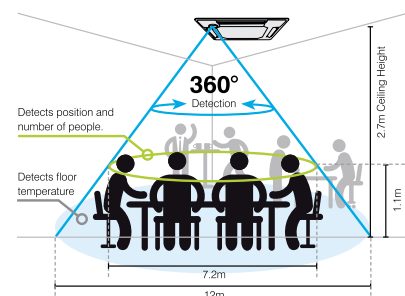

The 3D i-See Sensor detects whether or not there are people in the room, and automatically switches to one of the No Occupancy Modes, as set by the user.

In No Occupancy Energy Saving Mode when no one is in the room, the unit automatically reduces power consumption by approximately 10% after ten minutes, and 20% after 60 minutes. In No Occupancy Auto-Off Mode, when no one is in the room, the unit turns off automatically.



Outdoor Unit Specifications

Outdoor Unit						
REFRIGERANT		R32				
External Finish		Munsell 3.0Y 7.8/1.1				
Power Supply		Single-phase, 50Hz, 230V				
Compressor Output	(kW)	0.47	0.66	0.9	0.9	1.2
Airflow (Cooling/Heating)	m³/min(L/S)	36.3 (605)/34.6 (577)	34.3 (572)/32.7 (545)	45.8 (763)/43.7 (728)	50.1 (835)/50.1 (835)	50.1 (835)/50.1 (835)
Sound Pressure Level (Cooling/Heating)	(dB) *2	45/46	48/48	48/49	49/51	49/51
Sound Power Level	(dB)	59	63	66	68	68
Dimensions (Height x Width x Depth)	(mm)	550x800x285	550x800x285	714x800x285	880x840x330	880x840x330
Weight	(kg)	30	35	41	54	55
Piping Length (Chargeless/ Max.)	(m)	7/20	7/20	7/30	7/30	7/30
Breaker Size	(A)	10	10	20	20	20

Outdoor Unit					
REFRIGERANT		R32			
External Finish		Munsell 3.0Y 7.8/1.1			
Power Supply		Single-phase, 50Hz, 230V			
Compressor Output	(kW)	1.3	2.5	2.5	2.5
Airflow (Cooling/Heating)	m³/min(L/S)	55 (915)	110 (1,831)	120 (1,996)	120 (1,996)
Sound Pressure Level (Cooling/ Heating)	(dB)*2	47/51	49/51	50/52	50/52
Sound Power Level	(dB)	67	69	70	70
Dimensions (Height x Width x Depth)	(mm)	943x950x330	1,338x1,050x330	1,338x1,050x330	1,338x1,050x330
Weight	(kg)	70	113	113	113
Piping Length (Chargeless/ Max.)	(m)	30/50	30/75	30/75	30/75
Protection Device		Discharge thermo, HP switch			
Breaker Size	(A)	25	32	32	40

Amount of Required Refrigerant (R32: kg)

AMOUNT OF REQUIRED REFRIGERANT R32:KG						
Piping Length	Factory Charged (kg)	Additional Charge (kg)				
	7m	10m	15m	20m	25m	30m
SUZ-M25	0.65	0.06	0.16	0.26	-	-
SUZ-M35	0.9	0.06	0.16	0.26	-	-
SUZ-M50	1.2	0.06	0.16	0.26	0.36	0.46
SUZ-M60	1.25	0.06	0.16	0.26	0.36	0.46
SUZ-M71	1.45	0.12	0.32	0.52	0.72	0.92

Piping Length	Factory Charged (kg)	Additional Charge (kg)			
	30m	40m	50m	60m	75m
PUZ-ZM71	2.8	0.4	0.8	-	-
PUZ-ZM100/125/140	4.0	0.4	0.8	1.2	1.8

*Above specifications are for outdoor units only *2Sound pressure measurements were conducted in an anechoic chamber
The actual noise level depends on the distance from the unit and the acoustic environment

Outdoor Unit				
		PUZ-RP170VKA	PUZ-RP200YKA	PUHZ-RP250YKM
REFRIGERANT		R410A		
External Finish		Munsell 3.0Y 7.8/1.1	Munsell 3.0Y 7.8/1.1	Munsell 5.0Y 8.0/1.0
Power Supply		Single-phase, 50Hz, 230V	Three-phase, 50Hz, 400V	
Compressor Output	(kW)	3.0	3.7	6.9
Airflow (Cooling/Heating)	m ³ /min(L/S)	140 (2,330)	140 (2,330)	175 (2,917)
Sound Pressure Level (Cooling/Heating)	(dB)*2	58/59	58/59	58/58
Sound Power Level	(dB)	76	76	78
Dimensions (Height x Width x Depth)	(mm)	1,338x1,050x330	1,338x1,050x330	1,650x920x740
Weight	(kg)	124	135	199
Piping Length (Chargeless/ Max.)	(m)	30/75	30/75	0/75
Protection Device		Discharge thermo, HP switch		
Breaker Size	(A)	40	32	32

Amount of Required Refrigerant (R410A: kg)

AMOUNT OF REQUIRED REFRIGERANT R410A:KG						
Piping Length	Factory Charged (kg)	Additional Charge (kg)				
	30m	40m	50m	60m	70m	75m
PUZ-RP170	7.7	0.9	1.8	2.7	3.6	4.5
PUZ-RP200	7.7	0.9	1.8	2.7	3.6	4.5

Refrigerant Piping

Capacity	Between Indoor and Outdoor Units		Pipe Size OD (mm – in.)	Thickness (mm)
	Max. Height Difference (m)	Max. Piping Length (m)		
SUZ-M25	12	20	Liquid: Ø 6.35 – 1/4"	t 0.8
			Gas: Ø 9.52 – 3/8"	t 0.8
SUZ-M35	12	20	Liquid: Ø 6.35 – 1/4"	t 0.8
			Gas: Ø 9.52 – 3/8"	t 0.8
SUZ-M50	30	30	Liquid: Ø 6.35 – 1/4"	t 0.8
			Gas: Ø 12.7 – 1/2"	t 0.8
SUZ-M60	30	30	Liquid: Ø 6.35 – 1/4"	t 0.8
			Gas: Ø 15.88 – 5/8"	t 1.0
SUZ-M71	30	30	Liquid: Ø 9.52 – 3/8"	t 0.8
			Gas: Ø 15.88 – 5/8"	t 1.0
PUZ-ZM71	30	50	Liquid: Ø 9.52 – 3/8"	t 0.8
			Gas: Ø 15.88 – 5/8"	t 1.0
PUZ-ZM100/125/140	30	75	Liquid: Ø 9.52 – 3/8"	t 0.8
			Gas: Ø 15.88 – 5/8"	t 1.0
PUZ-RP170	30	75	Liquid: Ø 9.52 – 3/8"	t 0.8
			Gas: Ø 25.4 – 1"	t 1.0
PUZ-RP200	30	75	Liquid: Ø 9.52 – 3/8"	t 0.8
			Gas: Ø 25.4 – 1"	t 1.0
PUHZ-RP250	30	75	Liquid: Ø 9.52 – 3/8"	t 0.8
			Gas: Ø 22.2 – 7/8"	t 1.0

*Above specifications are for outdoor units only *2Sound pressure measurements were conducted in an anechoic chamber
The actual noise level depends on the distance from the unit and the acoustic environment



Peace of mind is assured with your choice of Mitsubishi Electric Heat Pumps. We support our product with a unique and comprehensive 5 year parts and labour warranty.



**Black Diamond
Technologies Limited**



**Exclusive New Zealand
Partner Since 1981**



Wellington

Head Office
1 Parliament Street
PO Box 30772
Lower Hutt 5040

Phone 04 560 9147

Auckland

Unit 1 / 4 Walls Road
PO Box 12726
Penrose
Auckland 1642

Phone 09 526 9347

Christchurch

44 Halwyn Drive
PO Box 16904
Hornby
Christchurch 8441

Phone 03 341 2837



**PLEASE LOOK AFTER THE
ENVIRONMENT AND RECYCLE**

For more information on Mitsubishi Electric Heat Pumps
please visit our website or call our Customer Service Team.

www.mitsubishi-electric.co.nz | 0800 784 382